



Roof Deck Protection

Helps guard against wind-driven rain and keep your roof system dry


- **An Extra Layer of Protection...** Between your shingles and your roof deck helps prevent wind-driven rain (or water from other sources) from infiltrating under your shingles and causing damage to your roof structure or the inside of your home
- **Lies Flatter...** Helps avoid buckling when installed for a great look
- **Helps Reduce Blow-off...** By allowing your shingles to lie flatter and more uniformly
- **Peace of Mind...** Eligible for up to a Lifetime Ltd. warranty when installed on Lifetime Shingle roofs¹



¹ See GAF Shingle & Accessory Ltd. Warranty for complete coverage and restrictions. The word "Lifetime" refers to the length of coverage provided by the GAF Shingle & Accessory Ltd. Warranty and means as long as the original individual owner(s) of a single-family detached residence [or the second owner(s) in certain circumstances] owns the property where the shingles and accessories are installed. For owners/structures not meeting the above criteria, Lifetime coverage is not applicable. Lifetime Ltd. warranty on accessories requires the use of at least three qualifying GAF accessories and the use of Lifetime Shingles.

Where They Fit Within The Lifetime Roofing System

1. Lifetime Shingles
2. Leak Barrier
3. Starter Strip Shingles
4. **Roof Deck Protection**
5. Cobra® Attic Ventilation
6. Ridge Cap Shingles

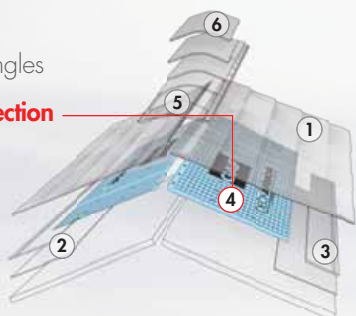

DECKARMOR™ Premium *Breathable* Roof Deck Protection



- **Revolutionary "Breathable" Technology...** Helps reduce moisture in the roofing system that can cause mold, mildew, and expensive structural damage
- **Enhanced Walkability...** Specially designed surface helps provide enhanced walkability for installers compared to conventional felts
- **Premium Construction...** Durable, non-asphaltic construction will not rot or become brittle (unlike conventional asphaltic felts, which can disintegrate over time)
- **Strong...** At least 600% greater tear strength than standard #30 felt¹
- **Great Look...** Helps resist wrinkling and buckling for a more uniform look


¹ GAF trapezoidal tear strength (lbs) testing per ASTM D4533.

SPECIFICATIONS

- UV-stabilized polypropylene construction resists UV degradation for up to 180 days*
- Meets or exceeds the physical requirements of ASTM D226 and D4869
- Miami-Dade County Product Control and State of Florida approved
- ICC-ES ESR-2808
- Approx: 10 squares (1,000 ft² [92.9 m²])/roll (excludes laps); length 223' (68 m); width 54" (1.4 m); 37 lb. (17 kg)/roll (nominal)
- Listed with Texas Department of Insurance as an acceptable alternate roof underlayment

*See footnote on next page

Note: **Always** use plastic cap nails or staples with plastic caps to install Deck-Armor™ Roof Deck Protection. Do **NOT** use nails or staples without caps.

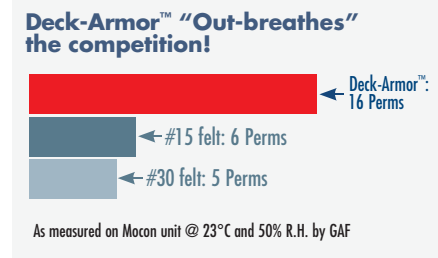

TIGERPAW™ Roof Deck Protection



- **Excellent Walkability...** Specially designed surface helps provide excellent walkability for installers compared to conventional felts
- **Moisture-Control Design...** Helps remove nearly twice as much damaging moisture from your roof deck as the leading synthetic non-breathable underlayment¹
- **Durable Construction...** Non-asphaltic, polypropylene construction will not rot or become brittle (unlike conventional felts, which can disintegrate over time)
- **Great Look...** Unlike conventional asphaltic felts, Tiger Paw™ Roof Deck Protection resists wrinkling and buckling that can "telegraph" through your roof shingles and detract from its finished appearance
- **Stronger...** Synthetic, non-woven construction provides at least 600% greater tear strength than standard #30 felt²

¹ As per GAF ASTM D570-modified testing.

² GAF trapezoidal tear strength (lbs) testing per ASTM D4533.

SPECIFICATIONS

- UV-stabilized polypropylene construction resists UV degradation for up to 180 days*
- Meets or exceeds the physical requirements of ASTM D226, D4869, and CSA A220-1
- Miami-Dade County Product Control and State of Florida approved
- ICC-ES ESR-3286
- Approx: 10 squares (1,000 ft² [92.9 m²])/roll (excludes laps); length 250' (76.2 m); width 48" (1.22 m); 40 lb. (18 kg)/roll (nominal)
- Listed with Texas Department of Insurance as an acceptable alternate roof underlayment

Note: **Always** use plastic cap nails or staples with plastic caps to install Tiger Paw™ Roof Deck Protection. Do **NOT** use nails or staples without caps.

*Note: 180-day UV resistance refers to standardized testing conducted by GAF to ensure the product will not physically degrade when exposed to UV. It is **NOT** related to withstanding water, snow, or wind. While Deck-Armor™ and Tiger Paw™ Roof Deck Protection are water resistant, they are **NOT WATERPROOF**. Do **NOT USE** Deck-Armor™ or Tiger Paw™ Roof Deck Protection as a temporary roof to protect property or possessions.

FELTBUSTER® HIGH-TRACTION SYNTHETIC ROOFING FELT



- **Enhanced Walkability...** Special spunbound surface helps provide increased traction compared to typical asphalt felts
- **Tough Synthetic Construction...** Helps resist tearing and will not absorb moisture, become brittle, or leach oils
- **Easy to Work With...** Super-lightweight, 10 square, 48" (1.23 m) wide roll (vs. typical 36" [914 mm] wide felt rolls)
- **Cooler to Work On...** Medium-gray surface is cooler than typical black asphalt felts and the leading black low-cost synthetic underlayment

SPECIFICATIONS

- UV-stabilized polypropylene construction resists UV degradation for up to 90 days¹
- For use with asphalt shingles
- Meets or exceeds the physical requirements of ASTM D226, D4869, and CSA A123-3
- Miami-Dade County Product Control and State of Florida approved
- Approx: 10 squares/roll (1,000 sq. ft. [92.9 m²] (excludes laps); length 250' (76.2 m); width 48" (1.22 m); 23 lb. (10.4 kg) / roll (nominal)
- Listed with Texas Department of Insurance as an acceptable alternate roof underlayment

Note: **Always** install FeltBuster® High-Traction Synthetic Roofing Felt using plastic cap nails or plastic cap staples. Do **NOT** use nails or staples without caps.

¹Note: 90-day UV resistance refers to standardized testing conducted by GAF to ensure the product will not physically degrade when exposed to UV. It is **NOT** related to withstanding water, snow, or wind. While FeltBuster® High-Traction Synthetic Roofing Felt is water resistant, it is **NOT WATERPROOF**. Do **NOT USE** FeltBuster® High-Traction Synthetic Roofing Felt as a temporary roof to protect property or possessions.



SHINGLE-MATE® Roof Deck Protection

- Fiberglass reinforced, so it lies flatter than typical asphalt felts for a more uniform look
- UL Listed for use in a variety of shingle roof assemblies with an ANSI/UL 790 Class A roofing fire rating¹
- Miami-Dade County Product Control and State of Florida approved
- Meets the physical requirements of ASTM D226 and ASTM D4869
- Approx: 4 squares/roll (432 ft² [40.13 m²]); length 144' (43.89 m); width 36" (914 mm); 30 lb. (13.6 kg)/roll

¹Refer to UL Online Certification Directory for actual assemblies.



VERSASHIELD® FIRE-RESISTANT ROOF DECK PROTECTION (Available across the U.S.; not available in Canada)

- The best protection against fire spread and penetration
- Fiberglass reinforced, so it lies flatter than typical asphalt felts for a better-looking roof
- Will upgrade the UL fire classification of almost any type of roof (refer to UL Certifications Directory for actual assemblies)
- Meets or exceeds ASTM D226 Type II, D4869 Type IV, and D6757 Type I or Type II
- Approx: 3.5 squares/roll (350 ft² [32.5 m²]) (excludes laps); length 100' (30.5 m); width 42" (1,067 mm); 52.5 lb. (24 kg)/roll
- Miami-Dade County Product Control and State of Florida approved
- ICC-ES ESR-2053
- Listed with Texas Department of Insurance as an acceptable alternate roof underlayment



ROOFPRO™ SBS-Modified All-Purpose Underlayment (Available in Western U.S. only)

- SBS-modified asphalt increases flexibility and provides long-lasting durability; up to 60 days¹ UV exposure resistance¹
- Fiberglass reinforced, so it lies flatter than typical asphalt felts for a more uniform look
- UL Listed for use in a variety of shingles and other roof assemblies with an ANSI/UL 790 Class A roofing fire rating²
- Meets or exceeds all physical properties of ASTM D226
- UL ER10689-01 Evaluation Report
- Approx: 2 squares/roll (216 gross ft² [20.1 m²]); length 65.8' (20.1 m); width 39.4" (1 m)

¹Note: 60-day UV resistance refers to standardized testing conducted by GAF to ensure the product will not physically degrade when exposed to UV. It is **NOT** related to withstanding water, snow, or wind. While RoofPro™ SBS-Modified All-Purpose Underlayment is water resistant, it is **NOT WATERPROOF**. Do **NOT USE** RoofPro™ SBS-Modified All-Purpose Underlayment as a temporary roof to protect property or possessions.

²Refer to UL Online Certification Directory for actual assemblies.